



Standard types




- Standard types available from stock
- Single and double cardanic designs
- Furthermore available with frictionally engaged shaft-hub-connection
- Finish bore according to ISO fit H7, feather keyway according to DIN 6885 sheet 1 - JS9
- Approved according to EC Standard 94/9/EC (Explosion Certificate ATEX 95)

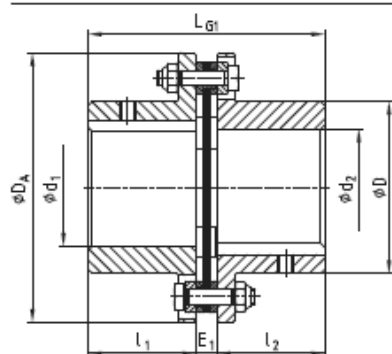


Type NN

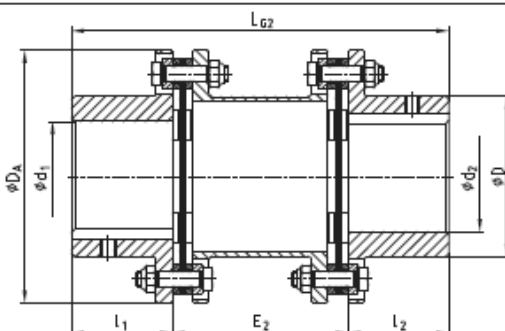


Type NANA 1

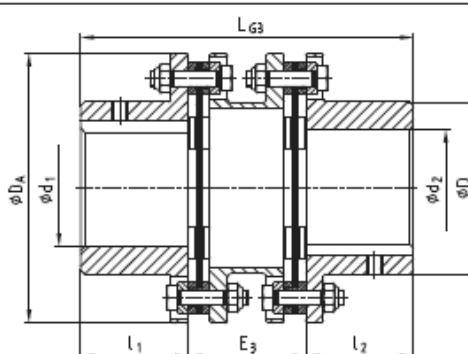


Type NANA 2

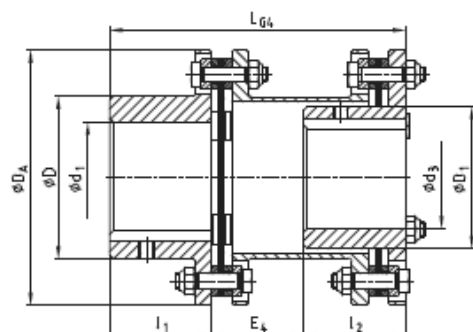

Type NENA 1

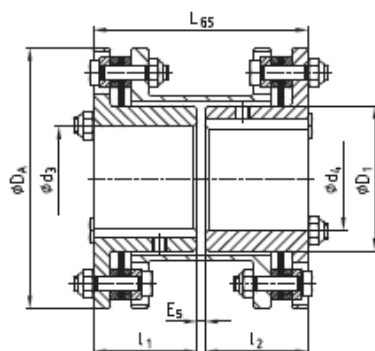

Type NENE 1

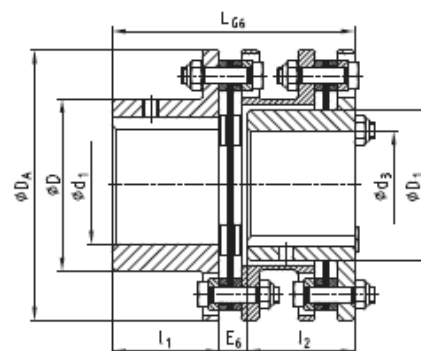

Type NENA 2

RADEX®-N types NN, NANA 1, NANA 2, NENA 1, NENE 1, NENA 2

Size	Finish bore		Dimensions [mm]																
	d ₁ /d ₂	d ₃ /d ₄	D	D ₁	D _A	l ₁ /l ₂	L _{G1}	E ₁	L _{G2}	E ₂	L _{G3}	E ₃	L _{G4}	E ₄	L _{G5}	E ₅	L _{G6}	E ₆	
20	20	-	32	-	56	20	45	5	100	60	-	-	-	-	-	-	-	-	
25	25	-	40	-	68	25	56	6	110	60	-	-	-	-	-	-	-	-	
35	35	-	54	-	82	40	86	6	150	70	-	-	-	-	-	-	-	-	
38	38	-	58	-	94	45	98	8	170	80	-	-	-	-	-	-	-	-	
42	42	-	68	-	104	45	100	10	170	80	-	-	-	-	-	-	-	-	
50	50	-	78	-	126	55	121	11	206	96	-	-	-	-	-	-	-	-	
60	60	55	88	77	138	55	121	11	206	96	170	60	160	50	114	4	124	14	
70	70	65	102	90	156	65	141	11	246	116	200	70	190	60	134	4	144	14	
80	80	75	117	104	179	75	164	14	286	136	233	83	220	70	154	4	167	17	
85	85	80	123	112	191	80	175	15	300	140	246	86	232	72	164	4	178	18	
90	90	85	132	119	210	80	175	15	300	140	251	91	233	73	166	6	184	24	
105	105	90	147	128	225	90	200	20	340	160	281	101	263	83	186	6	204	24	
115	115	100	163	145	265	100	223	23	370	170	309	109	288	88	206	6	227	27	
135	135	115	184	160	305	135	297	27	520	250	-	-	-	-	-	-	-	-	