

Coupling selection

The BoWex® coupling is selected in accordance with DIN 740 part 2. The coupling has to be dimensioned in a way that the permissible coupling load is not exceeded in any operating condition. For this purpose the actual loads have to be compared to the permissible parameters of the coupling.

1 Drives without periodical load

The coupling has been selected by checking the rated torques T_{KN} and maximum torque $T_{K \max}$:

2 Load produced by rated torque

$$T_{KN} \geq T_N \cdot S_t$$

Taking into consideration the ambient temperature, the permissible rated torque T_{KN} of the coupling has to correspond at least to the rated torque T_N of the machine.

$$T_N [\text{Nm}] = 9550 \cdot \frac{P_{AN/LN} [\text{kW}]}{n [1/\text{min}]}$$

3 Load produced by torque shocks

The permissible maximum torque of the coupling has to correspond at least to the total of peak torque T_S and the rated torque T_N of the machine, taking into account the shock frequency Z and the ambient temperature.

$$T_{K \max} \geq T_S \cdot S_Z \cdot S_t + T_N \cdot S_t$$

$$\text{Drive-sided shock} \\ T_S = T_{AS} \cdot M_A \cdot S_A$$

$$\text{Load-sided shock} \\ T_S = T_{LS} \cdot M_L \cdot S_L$$

$$M_A = \frac{J_L}{J_A + J_L} \quad M_L = \frac{J_A}{J_A + J_L}$$

This applies in case if the rated torque T_N of the machine is at the same time subject to shocks.

Knowing the mass distribution, shock direction and shock mode, the peak torque T_S can be calculated.

For drives with A. C.-motors with high masses on the load side we would recommend to calculate the peak driving torque with the help of our simulation programme.

Service factor S_t for temperature

Material of sleeve	-40 °C +60 °C	+70 °C	+80 °C	+90 °C	+100 °C	+110 °C	+120 °C
PA 6.6	1,0	1,2	1,4	1,6	1,8	-	-
PA-CF	1,0	1,1	1,2	1,4	1,6	1,9	2,2

Service factor S_Z for starting frequency

starting frequency/h	100	200	400	800
S_Z	1,0	1,2	1,4	1,6

Service factor S_A/S_L for shocks

	S_A/S_L
gentle shocks	1,5
average shocks	1,8
heavy shocks	2,5

Permissible load on feather key of the coupling hub

The shaft-hub-connection has to be verified by the customer.

Permissible surface pressure according to DIN 6892 (method C).

Description	Symbol	Definition or explanation
Rated torque of coupling	T_{KN}	Torque that can continuously be transmitted over the entire permissible speed range.
Maximum torque of coupling	$T_{K \max}$	Torque that can be transmitted as dynamic load $\geq 10^6$ times or 5×10^4 as vibratory load, respectively, during the entire operating life of the coupling.
Vibratory torque of coupling	T_{KW}	Torque amplitude of the permissible periodical torque fluctuation with a frequency of 10 Hz and a basic load of T_{KN} or dynamic load up to T_{KN} , respectively.
Damping power of coupling	P_{KW}	Permissible damping power with an ambient temperature of + 30 °C.
Rated torque of machine	T_N	Stationary rated torque on the coupling
Peak torque of machine	T_S	Peak torque on the coupling
Peak torque on the driving side	T_{AS}	Peak torque with torque shock on the driving side, e. g. breakdown torque of the electric motor.

Polyamide 30 N/mm² (up to + 40 °C)
Powder metal steel 180 N/mm²
Material steel S355J2G3 (St 52.3) 250 N/mm²
for other steel materials $p_{\text{perm.}} = 0,9 \cdot R_e (R_{p0.2})$

Description	Symbol	Definition or explanation
Peak torque of load side	T_{LS}	Peak torque with torque shock on load side, e. g. braking.
Vibratory torque of machine	T_W	Amplitude of the vibratory torque effective on the coupling.
Damping power of the machine	P_W	Damping power which is effective on the coupling due to the load produced by the vibratory torque.
Moment of inertia of driving side	J_A	Total of moments of inertia existing on the driving or load side referring to the coupling speed.
Moment of inertia of load side	J_L	
Rotational inertia coefficient of driving side	M_A	Factor taking into account the mass distribution with shocks and vibrations produced on the driving or load side. $M_A = \frac{J_L}{J_A + J_L} \quad M_L = \frac{J_A}{J_A + J_L}$
Rotational inertia coefficient of load side	M_L	

Cylindrical bores, taper/inch bores and selection of standard IEC motors

Stock programme cylindrical finish bores [mm] H7 keyway to DIN 6885 sheet 1 [JS9] with thread for setscrew																																
BoWex® size	un-/pilot bored	Ø8	Ø9	Ø10	Ø11	Ø12	Ø13	Ø14	Ø15	Ø16	Ø17	Ø18	Ø19	Ø20	Ø22	Ø24	Ø25	Ø28	Ø30	Ø32	Ø35	Ø38	Ø40	Ø42	Ø45	Ø48	Ø50	Ø55	Ø60	Ø65	Ø70	Ø75
14	●■	●	●	●	●	●	●	●■	●																							
19	●■			●	●	●		●	●	●	●	●	●■	●																		
24	●■			●	●	●		●■	●	●	●	●	●■	●	●	●■																
28	●■							●	●	●	●	●	●	●	●	●■	●	●■														
32	●■											●	●	●	●	●	●	●	●	●												
38	●■											●	●	●	●	●	●	●	●	●	●	●■										
42	●■													●	●	●	●	●	●	●	●	●	●	●								
48	●■																●	●	●	●	●	●	●	●	●■	●	●■					
65	●■																		●	●	●	●	●	●	●	●	●■	●■				
80	●																			●	●	●	●	●	●■	●■	●■	●■			●	●

● standard length ■ standard lengthened

Stock programme taper and inch bores																			
	Taper 1:5					Taper 1:8					Inch bores								
Code d ^{+0,05} b ^{JS9} t ^{+0,2}	A-10 9,85 2	B-17 16,85 3	C-20 19,85 4	D-25 24,85 5	E-30 29,85 6	N/1 9,7 2,4	N1d 14 3	N/2 17,28 3,2	N/2a 17,28 4	N/3 22 3,99	Ta 12,7 3,17 14,3	DNC 13,45 3,17 14,9	Ed 15,87 4,75 18,1	A 19,05 4,78 21,3	G 22,22 4,75 24,7	F 22,22 6,38 25,2	Bs 25,38 6,37 28,3	Hs 25,4 6,35 28,3	K 31,75 7,93 35,4
14	●					●							●						
19		●				●							●						
24	●	●				●	●	●	●		●		●	●					
28	●	●	●			●	●	●	●					●			●		
32		●	●																
38		●	●					●	●	●				●		●	●		●
42		●	●	●				●	●	●				●	●	●	●		●
48															●				●
65										●									

Further dimensions on request.


BoWex®-couplings for standard IEC-motors, protection type IP 54/IP 55										
A. C. motor size	Motor output with 50 Hz n = 3000 [1/min]			Motor output with 50 Hz n = 1500 [1/min]			Motor output with 50 Hz n = 1000 [1/min]			Cylindric shaft end d x l [mm] 3000 ≤ 1500
	kW	T [Nm]	BoWex®- coupling	kW	T [Nm]	BoWex®- coupling	kW	T [Nm]	BoWex®- coupling	
56	0,09	0,32		0,06	0,43		0,037	0,43		9 x 20
	0,12	0,41		0,09	0,64		0,045	0,52		
63	0,18	0,62	14	0,12	0,88	14	0,06	0,72	14	11 x 23
	0,25	0,86		0,18	1,3		0,09	1,1		
71	0,37	1,3		0,25	1,8		0,18	2,0		14 x 30
	0,55	1,9		0,37	2,5		0,25	2,7		
80	0,75	2,5	19	0,55	3,7	19	0,37	3,9	19	19 x 40
	1,1	3,7		0,75	5,1		0,55	5,8		
90 S	1,5	5,0	24	1,1	7,5	24	0,75	8,0	24	24 x 50
90 L	2,2	7,4		1,5	10		1,1	12		
100 L	3	9,8	28	2,2	15	28	1,5	15	28	28 x 60
112 M	4	13		3	20		2,2	22		
132 S	5,5	18	38	5,5	36	38	3	30	38	38 x 80
	7,5	25		7,5	49		4	40		
132 M							5,5	55		
160 M	11	36	42	11	72	42	7,5	75	42	42 x 110
	15	49		15	98		11	108		
160 L	18,5	60	48	18,5	121	48	15	148	48	48 x 110
180 M	22	71		22	144		18,5	181		
180 L							22	215		55 x 110
200 L	30	97		30	196					
	37	120								
225 S			65	37	240	65			65	55 x 110
225 M	45	145		45	292		30	293		
250 M	55	177		55	356		37	361		65 x 140
280 S	75	241		75	484		45	438		75 x 140
280 M	90	289		90	581	80	55	535	80	
315 S	110	353		110	707		75	727		80 x 170
315 M	132	423		132	849		90	873		
315 L	160	513	80	160	1030	100	110	1070	100	65 x 140
	200	641		200	1290		132	1280		
							160	1550		
315	250	801		250	1610	125	200	1930	125	85 x 170
	315	1010	315	2020	250		2420			
355	355	1140		355	2280					75 x 140
	400	1280	400	2560	315		3040			

Torque T $\hat{=}$ rated torque according to Siemens catalogue.

Displacements and threads for setscrews

Displacements

BoWex® couplings are double cardanic and in addition to transmitting the power compensate for axial, radial and angular shaft displacements in a way to prevent damages from the driving or driven machine, respectively.

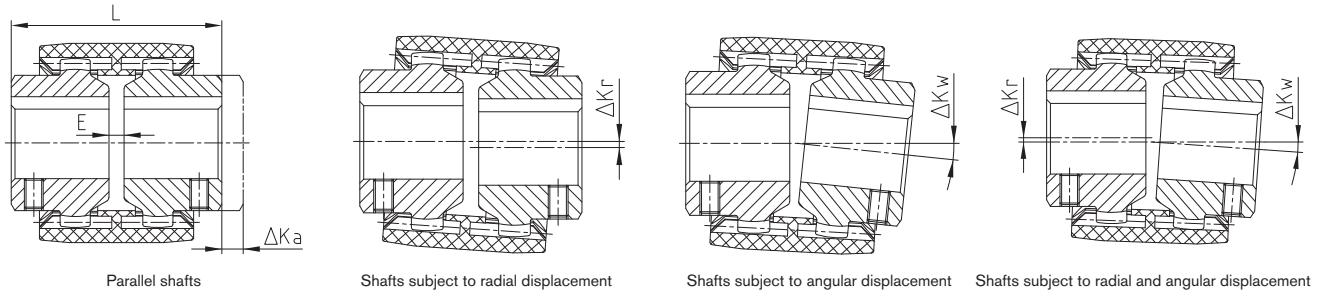

Displacements						
Type and size	Overall length L of the coupling assembled (standard design) ²⁾ [mm]	Can the coupled power pack be disassembled vertically without axial displacement?	Shift distance dimension E ¹⁾ [mm]	Max. axial displacement ΔKa [mm]	Max. permissible displacements ΔKr radial [mm] or ΔKw angular [°]	
junior 14 (plug-in coupling)	48	no	2	± 1	± 0,1	
junior 19 (plug-in coupling)	52					
junior 24 (plug-in coupling)	54					
junior M-14; M-14	50	no			± 0,3	
junior M-19; M-19	54					
junior M-24; M-24; Special I-24	56					
24 AS; 24 SSR	76	yes				
24 SG						
M-28; Special I-28						
28 AS; 28 SG; 28 SSR	84	yes	4		± 0,4	
M-32; Special I-32						
32 AS; 32 SG; 32 SSR						
M-38		no				
M-42						
45 AS; 45 SG; 45 SSR						
Special I-45	104	no		± 1		± 1° each hub
M-48						
M-65; Special I-65						
65 AS; 65 SG; 65 SSR	114	yes			± 0,6	
80 AS; 80 SSR						
I-80; Special I-80; 80 SG						
100 AS; 100 SSR	228	yes	8		± 0,8	
I-100; Special I-100; 100 SG						
125 AS; 125 SSR						
I-125; Special I-125; 125 SG	290	no	10		± 1,1	


The assembled hubs must in every case be flush with the shaft ends. If it is difficult to determine the distance dimension E, reference may be made to the overall assembled length. The shaft ends to be connected should be supported close to each coupling half.

- 1) The listed distance dimension E for the different couplings must be observed in every case, particularly for radial and angular misalignments.
- 2) If the coupling hubs have been shortened or lengthened on the outside, the overall length of the coupling assembled will be reduced by the corresponding figure.
- 3) The permissible displacement figures depend on speed and performance. We shall be glad to send you a displacement diagramme if required.

Prior to operation of the BoWex® coupling please make sure that the coupling sleeves are readily capable of axial movement.


The customer must provide guards in order to ensure that rotating parts cannot cause injury (Safety of Machines, DIN EN 292 part 2).

Threads for setscrews (Thread dimensions for setscrews. BoWex® coupling hubs with cylindrical bores.)



Position of the thread for setscrews
BoWex® M-14 to M-24
opposite to the keyway

BoWex® M-28 to I-125
on the keyway



Position of the thread for BoWex®

junior plug-in coupling
and junior M-coupling

BoWex® – coupling hubs						
Size	14	28	42	65	80	100
Dimensions	19	32	45	65	80	100
	24	38	48			
Thread G	M5	M8	M10	M10	M12	M16
Distance t	6	10	15 ¹⁾	20	30	40
			20			
Tightening torque T _A [Nm]	2	10	17	17	40	80


BoWex® junior – coupling hubs			
Size	14	19	24
Dimensions			
Thread G	M5	M5	M5
Hub 1b - Distance t	6	6	6
Plug-in sleeve 2b - Distance t	8	10	10
Tightening torque T _A [Nm]	1,4	1,4	1,4

1) Hub length 55 mm t = 15 mm, 70 mm t = 20 mm

Technical data


Power, Torque and Speed							
Design and size		Power $\frac{P \text{ [kW]}}{n \text{ [1/min]}}$		Torque T_K [Nm]			Max. speed [1/min]
		Rated	Maximum	T_{KN}	$T_{K \text{ max.}}$	T_{KW}	
Type plug-in coupling / junior M	junior 14 / M-14	0,0005	0,010	5	10	2,5	6000
	junior 19 / M-19	0,0008	0,0017	8	16	4	6000
	junior 24 / M-24	0,0013	0,0025	12	24	6	6000
Type M I AS Spez.-I SG SSR	14	0,0010	0,003	10	30	5	14000
	19	0,0017	0,005	16	48	8	11800
	24	0,0021	0,006	20	60	10	10600
	28	0,0047	0,014	45	135	23	8500
	32	0,0063	0,019	60	180	30	7500
	38	0,0084	0,025	80	240	40	6700
	42	0,010	0,031	100	300	50	6000
	45 / 48	0,015	0,044	140	420	70	5600
	65	0,040	0,119	380	1140	190	4000
	80	0,073	0,22	700	2100	350	3150
	100	0,13	0,38	1200	3600	600	3000
	125	0,26	0,78	2500	7500	1250	2120
Type M...C	14	0,0015	0,0047	15	45	7,5	14000
	19	0,0025	0,0075	24	72	12	11800
	24	0,003	0,009	30	90	15	10600
	28	0,007	0,022	70	210	35	8500
	32	0,009	0,028	90	270	45	7500
	38	0,013	0,038	120	360	60	6700
	48	0,021	0,063	200	600	100	5600
	65	0,058	0,18	560	1680	280	4000
Type FLE-PA	28	0,0078	0,014	75	185	37,5	6000
	32	0,014	0,028	135	335	67,5	6000
	48	0,025	0,050	240	600	120	5000
	T 48	0,030	0,078	300	750	150	5000
	T 55	0,047	0,12	450	1125	225	4500
	65	0,068	0,140	650	1600	325	3600
	T 65	0,084	0,210	800	2000	400	3600
	T 70	0,105	0,262	1000	2500	500	3400
	80	0,13	0,250	1200	3000	600	3000
	T 80	0,16	0,039	1500	3750	750	3000
	100	0,21	0,43	2050	5150	1025	2500
	T 100	0,26	0,65	2500	6250	1250	2500
	125	0,44	0,89	4250	10700	2125	2500
Type ELASTIC HE HEW HEW-ZS HE-ZS HEG	40Sh	0,014	0,041	130	390	36	
	42 HE 50Sh	0,016	0,047	150	450	45	6200
	65Sh	0,019	0,057	180	540	54	
	40Sh	0,021	0,063	200	600	60	
	48 HE 50Sh	0,024	0,072	230	690	69	5600
	65Sh	0,029	0,088	280	840	84	
	40Sh	0,037	0,110	350	1050	105	
	65 HE 50Sh	0,042	0,126	400	1200	120	4500
	65Sh	0,052	0,157	500	1500	150	
	40Sh	0,045	0,135	430	1290	129	
	G 65 HE 50Sh	0,052	0,157	500	1500	150	4300
	65Sh	0,065	0,195	620	1860	186	
	40Sh	0,089	0,267	750	2250	225	
	80 HE 50Sh	0,096	0,298	950	2850	285	3600
	65Sh	0,126	0,372	1200	3600	360	
	40Sh	0,130	0,39	1250	3750	375	
	G 80 HE 50Sh	0,16	0,50	1600	4800	480	3000
	65Sh	0,21	0,62	2000	6000	600	
	40Sh	0,21	0,62	2000	6000	600	
	100 HE 50Sh	0,26	0,78	2500	7500	750	2700
	65Sh	0,36	1,00	3200	9600	960	
	40Sh	0,31	0,942	3000	9000	900	
	125 HE 50Sh	0,41	1,256	4000	12000	1200	2300
	70Sh	0,52	1,570	5000	15000	1500	
	40Sh	0,42	1,26	4000	12000	1200	
	G 125 HE 50Sh	0,54	1,63	5200	16000	1600	2100
	70Sh	0,68	2,04	6500	20000	2000	
	40Sh	0,58	1,73	5500	16500	1650	
	150 HE 50Sh	0,73	2,20	7000	21000	2100	1800
	70Sh	0,94	2,83	9000	27000	2700	

Type junior plug-in coupling and type junior M from nylon

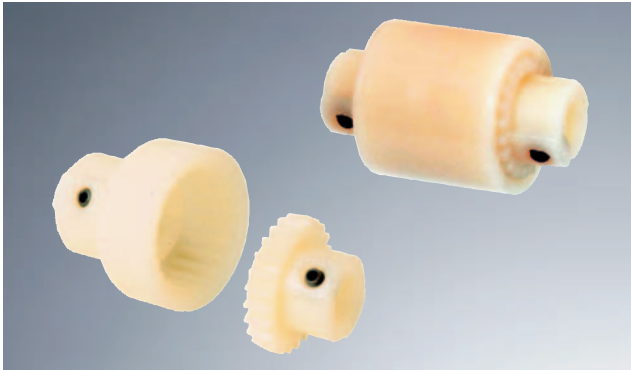


- Curved-tooth gear coupling plug-in type (2 parts) from nylon
- Double cardanic curved-tooth gear coupling type M (3 parts) from nylon
- Maintenance-free due to material combination nylon
- Compensating for axial, radial and angular shaft misalignment
- Low weight and small flywheel effect
- Axial plug-in – easy assembly
- Operating range - 25 °C to + 100 °C
- Available from stock with finish bore for standard shafts including keyway to DIN 6885 sheet 1 and thread for set-screws, bore tolerance + 0,05 - 0,1 keyway tolerance ± 0,08, H7 fit for steel hubs only

Components

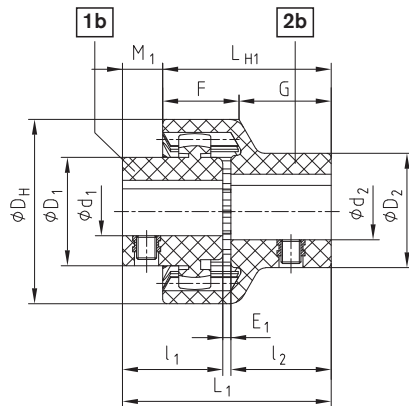

Type junior plug-in coupling (2 parts)

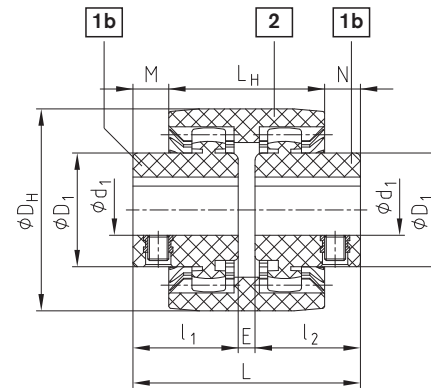

Type junior M coupling (3 parts)

BoWex® junior plug-in coupling (2 parts) and BoWex® junior M (3 parts)





Size	Torque T _K [Nm]		Finish bore				Dimensions [mm]												Max. speed [1/min]
	T _{KN}	T _{Kmax.}	Hub part 1b d ₁	D ₁	Plug-in- sleeve part 2b d ₂	D ₂	D _H	l ₁ , l ₂	E ₁	L ₁	L _{H1}	M ₁	F	G	E	L	L _H	M, N	
14	5	10	Ø6, Ø7, Ø8, Ø9	22	Ø8	22	40	23	2	48	40	8	18,5	21,5	4	50	37	6,5	6000
M-14			Ø10, Ø11	25	Ø10, Ø11	25													
			Ø12, Ø14	26	Ø12, Ø14	26													
19	8	16	Ø12, Ø14	27	Ø14, Ø15	29	47	25	2	52	42	10	19,0	23,0	4	54	37	8,5	6000
M-19			Ø16	30															
			Ø19	32		Ø19													
			Ø10, Ø11, Ø12	26	Ø14, Ø16	32													
24	12	24	Ø14, Ø15, Ø16	32			53	26	2	54	45	9	21,5	23,5	4	56	41	7,5	6000
M-24			Ø18, Ø19, Ø20	36		Ø19, Ø20													
			Ø24	38	Ø24	40													

Order form:

BoWex® junior 19	d_1 Ø 19	d_2 Ø 14
Coupling size 2-parted type or BoWex® junior M-19 3-parted type	Finish bore	Finish bore

Taper bores

BoWex® with taper bores



$$L_{tot} = l_1 + E + l_{2K}$$

For stock parts please see page 75


Taper bores 1:5																						
Dimensions [mm]					Counterbore d _K and hub length l _{2K} [mm]																	
					Recess on hub collar D ₁ x l [mm]																	
Code	Details of bores				14		19		24		28		32		38		42		48		65	
	d ^{+0,05}	b ^{JS9}	t ₂ ^{+0,1}	l _K	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}
A-10	9,85	2	1,0	11,5	18	23	18	25	25	26	25	26	25	26	25	26						
					-		30 x 7		30 x 7		30 x 5		-		30 x 5							
B-17	16,85	3	1,8	18,5			25	30	28	30	36	40	36	40	36	40	45	42	45	42	45	50
C-20	19,85	4	2,2	21,5					28	36	36	40	36	40	36	40	45	42	45	42	45	50
Cs-22	21,95	3	1,8	21,5					28	36	36	40	36	40	36	40	45	42	45	42		
D-25	24,85	5	2,9	26,5							36	40	36	40	36	40	45	42	45	42	45	50
E-30	29,85	6	2,6	31,5											45	55	45	55	45	55	45	55
F-35	34,85	6	2,6	36,5															52	60	55	60
G-40	39,85	6	2,6	41,5															52	60	65	70

Taper bores 1:8																						
Dimensions [mm]					Counterbore d _K and hub length l _{2K} [mm]																	
					Recess on hub collar D ₁ x l [mm]																	
Code	Details of bores				14		19		24		28		32		38		42		48		65	
	d ^{+0,05}	b ^{JS9}	t ₂ ^{+0,1}	l _K	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}
N/1	9,7 ±0,015	2,4	10,85	17	18	26	18	25	25	26	25	30	25	30	25	30						
N/1c	11,6	3 ^{JS9}	12,90	16,5	23 x 8		23 x 8		23 x 8		23 x 8		-		23 x 8							
N/1e	13	2,4	13,80	21					25	30	25	30			25	30						
N/1d	14	3 ^{JS9}	15,50	17,5	20	23	25	30	28	30	28	30	28	40								
					-		-		-		28 x 10		-									
N/2	17,287	3,2	18,24	24					28	35	36	40	36	40	36	40	45	42	45	42	45	50
									-		35 x 12		-		-		-		-		-	
N/2a	17,287	4 ^{JS9}	18,94	24					28	35	36	40	36	40	36	40	45	42	45	42	45	50
									-		35 x 12		-		-		-		-		-	
N/2b	17,287	3 ^{JS9}	18,34	24					28	35					36	40	45	42	45	42		
									-						-		-		-			
N/3	22,002	4 ^{JS9}	23,40	28							36	40	36	40	36	40	45	42	45	42	45	50
											-		-		-		-		-		48 x 14	
N/4	25,463	4,78	27,83	36							36	50	36	50	36	50	45	50	45	50	45	62
											-		-		-		58 x 10		58 x 10		-	
N/4b	25,463	5 ^{JS9}	28,23	36							36	50					45	50	45	50	45	62
N/4a	27	4,78	28,80	32,5											36	50						
N/4g	28,45	6 ^{JS9}	29,32	38,5											36	60	45	60	45	60		
N/5	33,176	6,38	35,39	44											45	60	45	60	45	60	45	62
N/5a	33,176	7 ^{JS9}	35,39	44													45	60	45	60	45	62

Taper bores 1:10																						
Dimensions [mm]					Counterbore d _K and hub length l _{2K} [mm]																	
Code	Details of bores				14		19		24		28		32		38		42		48		65	
	d ^{+0,05}	b ^{JS9}	t ^{+0,1}	l _K	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}	d _K	l _{2K}
CX-20	19,85	5	22,08	32							36	50			36	50	45	50	45	50		
DX-25	24,95	6	26,68	45									36	50			45	60	45	60	45	60
EX-30	29,75	8	31,88	50													45	60	45	60	45	70

Spline hubs and inch bores

Basic programme of BoWex® spline hubs

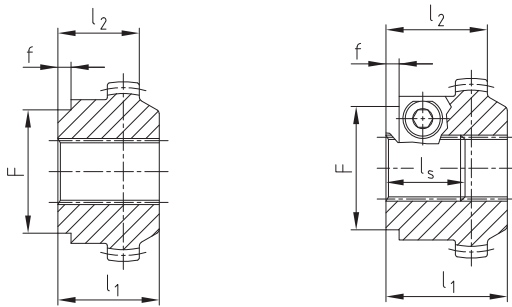

Spline hub (N)

Clamping hub (K)

If it is not possible to secure the hubs of pump shafts with involute spline by means of an end plate and a screw, we recommend our spline clamping hub.

The radial clamping ensures a backlash-free tight fit on the pump shaft.

Spline and clamping hubs to DIN 5480								
Size	Dimensions [mm]							Order designation Indicate coupling size
	Type	Spline size	l ₁	l ₂	l _s	F	f	
42	N	25x1,25x18	42	-	-	-	-	P000205
	K	25x1,25x18	42	-	-	-	-	P500202
48	K	30x2x14	42	-	-	60	6	P500203
	N	30x2x14	50	-	-	60	6	P000206
65	K	30x2x14	50	-	-	60	6	P500203
	N	35x2x16	55	-	-	60	6	P000303
65	K	35x2x16	60	-	-	60	6	P500301
	N	40x2x18	55	-	-	78	6	P000304
65	K	40x2x18	60	-	-	78	6	P500302
	K	45x2x21	55	-	-	78	6	P500401

Spline and clamping hubs to SAE J498								
Size	Dimensions [mm]							Order designation Indicate coupling size
	Type	Spline size	l ₁	l ₂	l _s	F	f	
42	K	PH-S 5/8" 16/32DP, z=9	42	-	-	-	-	P558101
	K	PI-S 3/4" 16/32DP, z=11	-	35	-	-	-	P559101
48	K	PB-S 7/8" 16/32DP, z=13	42	-	-	60	3	P567101
	K	PB-BS 1" 16/32DP, z=15	42	-	27	50	6	P660201
48	K	PA-S 3/8" 16/32DP, z=21	50	-	45	52	7	P663301
	K	PA-S 3/8" 16/32DP, z=21	55	-	48	52	5	P663301
65	K	PC-S 1 1/4" 16/32DP, z=14	55	-	44	52	5	P656201

Inch bores – For the stock parts please see the stock programme on page 75															
Code	Dimensions [mm]				Code	Dimensions [mm]				Code	Dimensions [mm]				
	Ød	Ød [inch]	b ^{+0,05}	t ₂ ^{+0,2}		Ød	Ød [inch]	b ^{+0,05}	t ₂ ^{+0,2}		Ød	Ød [inch]	b ^{+0,05}	t ₂ ^{+0,2}	
Tb	9,5 ^{+0,03}	3/8	3,17	11,1	F	22,22 ^{+0,03}	7/8	6,38	25,2	M	34,92 ^{+0,03}	1 3/8	7,93	38,6	
DNB	11,11 ^{M7}	7/16	2,4	12,5	Gd	22,225 ^{M7}	7/8	4,76	24,7	RH1	34,93 ^{M7}	1 3/8	9,55	37,8	
T	12,69 ^{H7}	1/2	4,75	14,6	Gf	23,80 ^{+0,03}	15/16	6,35	26,8	Cb	36,50 ^{+0,03}	1 7/16	9,55	40,9	
Ta	12,7 ^{+0,03}	1/2	3,17	14,3	B	25,37 ^{+0,03}	1	4,78	27,8	Ca	38,07 ^{+0,03}	1 1/2	7,93	42,0	
DNC	13,45 ^{M7}	17/32	3,17	14,9	Ba	25,37 ^{+0,03}	1	6,35	27,6	C	38,07 ^{+0,03}	1 1/2	9,55	42,5	
E	15,87 ^{+0,03}	5/8	3,17	17,5	Bs	25,38 ^{+0,03}	1	6,37	28,3	N	41,25 ^{+0,03}	1 5/8	9,55	45,6	
S	15,87 ^{+0,03}	5/8	3,97	17,9	H	25,40 ^{+0,03}	1	4,78	27,8	Nb	41,275 ^{M7}	1 5/8	9,55	45,8	
Es	15,88 ^{+0,03}	5/8	4,0	17,7	DNF	25,38 ^{H7}	1	6,35	28,4	Ls	44,42 ^{+0,03}	1 3/4	9,55	48,8	
DND	15,852 ^{H7}	5/8	4,75	18,1	Hs	25,40 ^{+0,03}	1	6,35	28,7	L	44,45 ^{K7}	1 3/4	11,11	49,4	
Ed	15,87 ^{+0,03}	5/8	4,75	18,1	Sa	28,575 ^{M7}	1 1/8	6,35	31,7	Lu	47,625 ^{M7}	1 7/8	12,7	53,5	
DNH	17,465 ^{H7}	11/16	4,75	19,6	Sb	28,58 ^{+0,03}	1 1/8	6,35	31,5	Da	49,20 ^{+0,03}	1 15/16	12,7	55,0	
Ad	19,02 ^{+0,03}	3/4	3,17	20,7	Sd	28,58 ^{+0,03}	1 1/8	7,93	32,1	Ds	50,77 ^{+0,03}	2	12,7	56,4	
As	19,02 ^{+0,03}	3/4	4,78	21,3	Ja	31,70 ^{H7}	1 1/4	7,93	34,4	D	50,80 ^{+0,03}	2	12,7	55,1	
A	19,05 ^{+0,03}	3/4	4,78	21,3	Jc	31,71 ^{+0,03}	1 1/4	7,93	35,3	P	53,95 ^{+0,03}	2 1/8	12,7	59,6	
Fa	22,20 ^{+0,03}	7/8	6,35	25,2	Js	31,75 ^{+0,03}	1 1/4	6,35	34,6	Pa	53,975 ^{M7}	2 1/8	12,7	60,0	
Ga	22,21 ^{H7}	7/8	4,75	24,8	J	31,75 ^{+0,03}	1 1/4	7,93	34,4	Ub	60,325 ^{M7}	2 3/8	15,875	67,6	
DNI	22,228 ^{H7}	7/8	6,35	25,0	K	31,75 ^{K7}	1 1/4	7,93	35,5	Wa	73,025 ^{M7}	2 7/8	19,05	81,7	
Gs	22,22 ^{+0,03}	7/8	4,78	24,4	DNK	31,755 ^{H7}	1 1/4	7,93	35,3	Wd	85,725 ^{M7}	3 3/8	22,225	95,8	
G	22,22 ^{+0,03}	7/8	4,75	24,7	Ma	34,925 ^{M7}	1 3/8	7,93	38,7	Wf	92,075 ^{M7}	3 5/8	22,225	101,9	