


Roulements à billes à contact oblique 2344

à double effet, dissociable, tolérances réduites

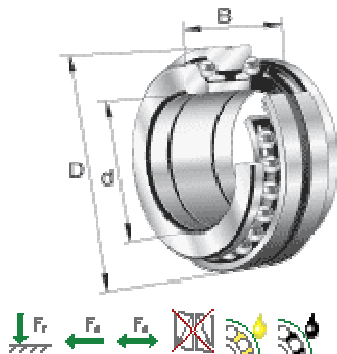

	d mm	D mm	B mm	
234406-M-SP	30	55	32	
234407-M-SP	35	62	34	
234408-M-SP	40	68	36	
234409-M-SP	45	75	38	
234410-M-SP	50	80	38	
234411-M-SP	55	90	44	
234412-M-SP	60	95	44	
234413-M-SP	65	100	44	
234414-M-SP	70	110	48	
234415-M-SP	75	115	48	
234416-M-SP	80	125	54	
234417-M-SP	85	130	54	
234418-M-SP	90	140	60	
234419-M-SP	95	145	60	
234420-M-SP	100	150	60	
234421-M-SP	105	160	66	
234422-M-SP	110	170	72	
234424-M-SP	120	180	72	
234426-M-SP	130	200	84	
234428-M-SP	140	210	84	
	d mm	D mm	B mm	
234430-M-SP	150	225	90	
234432-M-SP	160	240	96	
234434-M-SP	170	260	108	
234436-M-SP	180	280	120	
234438-M-SP	190	290	120	
234440-M-SP	200	310	132	
234444-M-SP	220	340	144	
234448-M-SP	240	360	144	
234452-M-SP	260	400	164	
234456-M-SP	280	420	164	
234460-M-SP	300	460	190	
234464-M-SP	320	480	190	
234468-M-SP	340	520	212	
234472-M-SP	360	540	212	
234476-M-SP	380	560	212	
234480-M-SP	400	600	236	