


Roulements de broche HS70..-E

réglés, par paire ou par jeu, angle de contact $\alpha = 25^\circ$, tolérances réduites

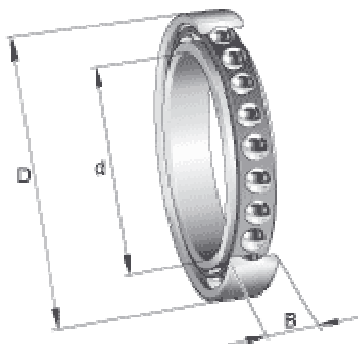

	d mm	D mm	B mm
HS7000-E-T-P4S	10	26	8
HS7001-E-T-P4S	12	28	8
HS7002-E-T-P4S	15	32	9
HS7003-E-T-P4S	17	35	10
HS7004-E-T-P4S	20	42	12
HS7005-E-T-P4S	25	47	12
HS7006-E-T-P4S	30	55	13
HS7007-E-T-P4S	35	62	14
HS7008-E-T-P4S	40	68	15
HS7009-E-T-P4S	45	75	16
HS7010-E-T-P4S	50	80	16
HS7011-E-T-P4S	55	90	18
HS7012-E-T-P4S	60	95	18
HS7013-E-T-P4S	65	100	18
HS7014-E-T-P4S	70	110	20
HS7015-E-T-P4S	75	115	20
HS7016-E-T-P4S	80	125	22
HS7017-E-T-P4S	85	130	22
HS7018-E-T-P4S	90	140	24
HS7019-E-T-P4S	95	145	24
HS7020-E-T-P4S	100	150	24
HS7021-E-T-P4S	105	160	26
HS7022-E-T-P4S	110	170	28
HS7024-E-T-P4S	120	180	28
HS7026-E-T-P4S	130	200	33
HS7028-E-T-P4S	140	210	33