


Roulements de broche HS719.-C

réglés, par paire ou par jeu, angle de contact $\alpha = 15^\circ$, tolérances réduites

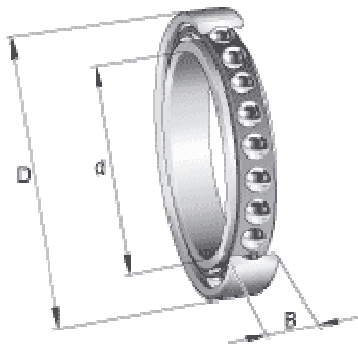

	d mm	D mm	B mm
HS71900-C-T-P4S	10	22	6
HS71901-C-T-P4S	12	24	6
HS71902-C-T-P4S	15	28	7
HS71903-C-T-P4S	17	30	7
HS71904-C-T-P4S	20	37	9
HS71905-C-T-P4S	25	42	9
HS71906-C-T-P4S	30	47	9
HS71907-C-T-P4S	35	55	10
HS71908-C-T-P4S	40	62	12
HS71909-C-T-P4S	45	68	12
HS71910-C-T-P4S	50	72	12
HS71911-C-T-P4S	55	80	13
HS71912-C-T-P4S	60	85	13
HS71913-C-T-P4S	65	90	13
HS71914-C-T-P4S	70	100	16
HS71915-C-T-P4S	75	105	16
HS71916-C-T-P4S	80	110	16
HS71917-C-T-P4S	85	120	18
HS71918-C-T-P4S	90	125	18
HS71919-C-T-P4S	95	130	18
HS71920-C-T-P4S	100	140	20
HS71921-C-T-P4S	105	145	20
HS71922-C-T-P4S	110	150	20
HS71924-C-T-P4S	120	165	22
HS71926-C-T-P4S	130	180	24
HS71928-C-T-P4S	140	190	24