



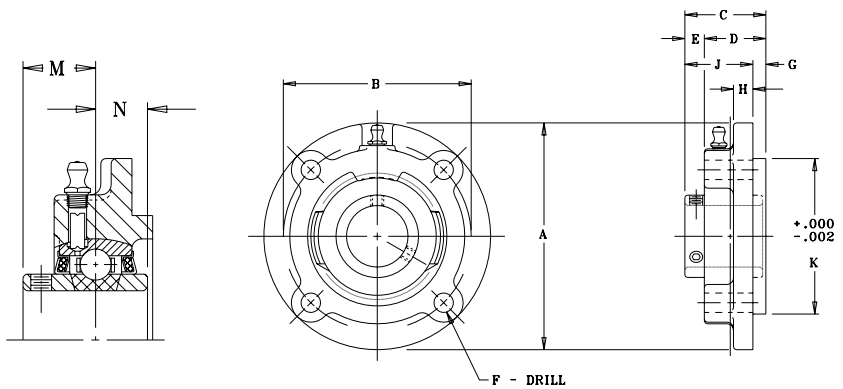


SFC Series Standard Duty Flange Cartridge Units...Setscrew Locking

SHAFT DIAM. IN MM	PART NO.	BRG. NO.	Dimensions in Inches												UNIT WT.
			A	B	C	D	E	F	G	H	J	K	M	N	
1 1/8 1 3/16 1 1/4 30	SFC-18 SFC-19 SFC-20R SFC-206	2-12 2-13 1-14 5206	4 3/8	3 5/8	1 9/16	1 3/16	3/8	3/8	1/4	3/8	1 5/16	3.000	7/8	5/8	3.0
1 1/4 1 5/16 1 3/8 1 7/16 35	SFC-20 SFC-21 SFC-22 SFC-23 SFC-207	2-14 2-15 2-16 2-17 5207	5	4 1/8	1 11/16	1 1/4	7/16	7/16	3/8	3/8	1 5/16	3.375	1	11/16	3.9
1 1/2 1 9/16 40	SFC-24 SFC-25 SFC-208	2-18 2-19 5208	5 1/4	4 3/8	1 15/16	1 15/32	15/32	7/16	7/16	7/16	1 1/2	3.625	1 3/16	3/4	4.7
1 5/8 1 11/16 1 3/4 45	SFC-26 SFC-27 SFC-28 SFC-209	2-110 2-111 2-112 5209	6 1/8	5 1/8	1 15/16	1 7/16	1/2	1/2	7/16	7/16	1 1/2	4.250	1 3/16	3/4	6.0
1 7/8 1 15/16 2 50	SFC-30 SFC-31 SFC-32R SFC-210	2-114 2-115 1-2 5210	6 1/8	5 1/8	2 1/32	1 15/32	9/16	1/2	15/32	7/16	1 9/16	4.250	1 9/32	3/4	6.5
2 2 1/8 2 3/16 55	SFC-32 SFC-34 SFC-35 SFC-211	2-2 2-22 2-23 5211	6 3/8	5 3/8	2 3/16	1 5/8	9/16	1/2	5/8	7/16	1 9/16	4.500	1 5/16	7/8	7.5
2 1/4 2 3/8 2 7/16 60	SFC-36 SFC-38 SFC-39 SFC-212	2-24 2-26 2-27 5212	7 1/8	6	2 9/16	1 7/8	11/16	9/16	7/8	1/2	1 11/16	5.000	1 9/16	1	10.5
2 11/16 70	SFC-43 SFC-214	2-211 5214	7 5/8	6 1/2	2 7/8	2 3/16	11/16	9/16	1 1/8	9/16	1 3/4	5.500	1 11/16	1 1/16	14.0
2 7/8 2 15/16 75	SFC-46 SFC-47 SFC-215	2-214 2-215 5215	8 3/4	7 1/2	3 1/16	2 5/16	3/4	11/16	1 1/16	9/16	2	6.375	1 3/4	1 5/16	18.7
3 3/16 80	SFC-51 SFC-216	2-33 5216	8 3/4	7 1/2	3 1/4	2 7/16	13/16	11/16	1 1/4	5/8	2	6.375	1 15/16	1 5/16	20.0


For Load Ratings, see page 45. For Standard Duty Bearing Inserts-Single Lock, see page 43.



Felt Seal Standard
Positive sealing for low, medium, and high speed operation.



Single Lip Contact Seal
Available on all sizes. Recommended where moisture conditions prevail. To specify, add suffix "C" (SFC-16C).



Hi-Temp Seal
Available as an option where operating temperatures are in 250-400° range. (See seal options on page 188).