




Paliers à semelle avec corps en tôle

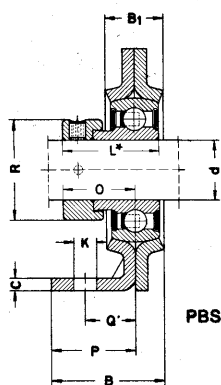


PBS



PB





PBY



RPB

d	A	B	B ₁	C	H	K	K ₁	L	M	O	P	Q	R _{max}	W	Mas- se	Cap. corps de palier C _g N	Charges de base		Désignations	
															≈ kg		dyn. C N	stat. C ₀ N	Palier	Corps / Roulement
12	30.2	32.5	14.2	2.6	59.6	10.5	5.6	28.6	92.0	22.1	25.4	15.0	28.0	123.8	0.32	2700	9600 / 4750	PBS 12	40 PBS / RAE 12 NPPB	
	22.2	25.4	18.4	2.6	43.2	9.5	—	28.6	68.0	22.1	—	—	28.0	85.7	0.17	1350	9600 / 4750	PB 12	40 B/T / RAE 12 NPPB	
	22.2	25.4	18.4	2.6	43.2	9.5	—	22.0	68.0	16.0	—	—	—	85.7	0.15	1350	9600 / 4750	PBY 12	40 B/T / AY 12 NPPB	
	25.4	31.8	22.3	3.3	50.1	9.5	—	28.6	76.0	22.1	—	—	28.0	98.4	0.23	900	9600 / 4750	RPB 12	47 B/T / RAE 12 NPPB	
15	30.2	32.5	14.2	2.6	59.6	10.5	5.6	28.6	92.0	22.1	25.4	15.0	28.0	123.8	0.32	2700	9600 / 4750	PBS 15	40 PBS / RAE 15 NPPB	
	22.2	25.4	18.4	2.6	43.2	9.5	—	28.6	68.0	22.1	—	—	28.0	85.7	0.17	1350	9600 / 4750	PB 15	40 B/T / RAE 15 NPPB	
	22.2	25.4	18.4	2.6	43.2	9.5	—	22.0	68.0	16.0	—	—	—	85.7	0.15	1350	9600 / 4750	PBY 15	40 B/T / AY 15 NPPB	
	25.4	31.8	22.3	3.3	50.1	9.5	—	28.6	76.0	22.1	—	—	28.0	98.4	0.23	900	9600 / 4750	RPB 15	47 B/T / RAE 15 NPPB	
17	30.2	32.5	14.2	2.6	59.6	10.5	5.6	28.6	92.0	22.1	25.4	15.0	28.0	123.8	0.32	2700	9600 / 4750	PBS 17	40 PBS / RAE 17 NPPB	
	22.2	25.4	18.4	2.6	43.2	9.5	—	28.6	68.0	22.1	—	—	28.0	85.7	0.17	1350	9600 / 4750	PB 17	40 B/T / RAE 17 NPPB	
	22.2	25.4	18.4	2.6	43.2	9.5	—	22.0	68.0	16.0	—	—	—	85.7	0.15	1350	9600 / 4750	PBY 17	40 B/T / AY 17 NPPB	
	25.4	31.8	22.3	3.3	50.1	9.5	—	28.6	76.0	22.1	—	—	28.0	98.4	0.23	900	9600 / 4750	RPB 17	47 B/T / RAE 17 NPPB	
20	33.6	33.0	15.8	3.0	66.8	10.5	5.6	31.0	97.0	23.5	25.4	15.0	33.0	127.0	0.45	3200	12800 / 6600	PBS 20	47 PBS / RAE 20 NPPB	
	25.4	31.8	22.3	3.3	50.1	9.5	—	31.0	76.0	23.5	—	—	33.0	98.4	0.27	1600	12800 / 6600	PB 20	47 B/T / RAE 20 NPPB	
	25.4	31.8	22.3	3.3	50.1	9.5	—	25.0	76.0	18.0	—	—	—	98.4	0.22	1600	12800 / 6600	PBY 20	47 B/T / AY 20 NPPB	
	28.6	31.8	23.5	4.0	56.5	11.5	—	31.0	86.0	23.5	—	—	33.0	108.0	0.28	1100	12800 / 6600	RPB 20	52 B/T / RAE 20 NPPB	

* Mesuré sur la bague intérieure.
En principe, nous ne livrons que des paliers complets.

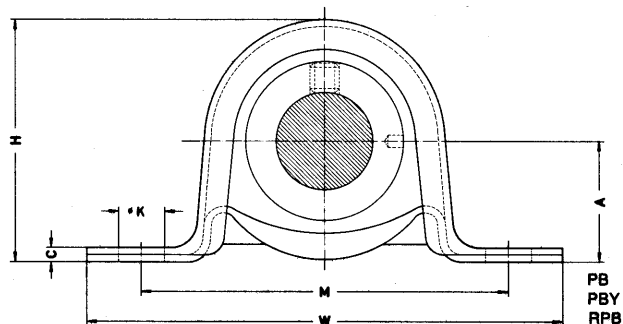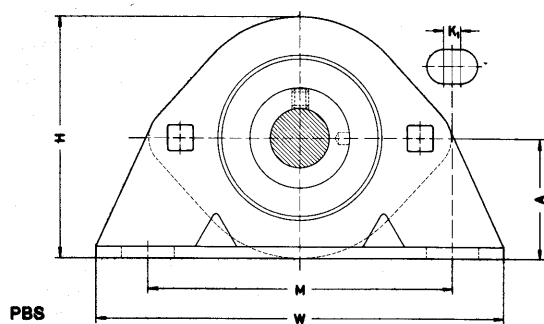

d	A	B	B ₁	C	H	K	K ₁	L	M	O	P	Q	R _{max}	W	Mas- sa ≈ kg	Cap. corps de palier C _g N°	Charges de base		Désignations	
																	dyn. C N	stat. C ₀ N	Palier	Corps / Roulement
25	36.5	34.1	17.4	3.4	72.0	10.5	9.5	31.0	95.5	23.5	25.4	14.3	37.5	133.5	0.49	3600	14000 / 7800	7800	PBS 25	52 PBS / RAE 25 NPPB
	28.6	31.8	23.5	4.0	56.5	11.5	—	31.0	86.0	23.5	—	—	37.5	108.0	0.30	1800	14000 / 7800	7800	PB 25	52 B/T / RAE 25 NPPB
	28.6	31.8	23.5	4.0	56.5	11.5	—	27.0	86.0	19.5	—	—	—	108.0	0.26	1800	14000 / 7800	7800	PBY 25	52 B/T / AY 25 NPPB
	33.3	38.0	26.5	4.0	66.1	11.5	—	31.0	95.0	23.5	—	—	37.5	117.5	0.38	1400	14000 / 7800	7800	RPB 25	62 B/T / RAE 25 NPPB
30	42.9	38.9	17.4	3.4	85.0	13.5	8.0	35.7	119.0	26.7	30.2	16.0	44.0	159.0	0.79	3600	19500 / 11300	11300	PBS 30	62 PBS / RAE 30 NPPB
	33.3	38.0	26.5	4.0	66.1	11.5	—	35.7	95.0	26.7	—	—	44.0	117.5	0.50	2700	19500 / 11300	11300	PB 30	62 B/T / RAE 30 NPPB
	33.3	38.0	26.5	4.0	66.1	11.5	—	30.0	95.0	21.0	—	—	—	117.5	0.40	2700	19500 / 11300	11300	PBY 30	62 B/T / AY 30 NPPB-1
	33.3	38.0	26.5	4.0	66.1	11.5	—	26.5	95.0	20.0	—	—	42.5	117.5	0.45	1400	13200 / 8300	8300	RPB 30	62 B/T / RAE 30 NPPB
35	47.6	46.1	22.2	4.0	94.4	13.5	8.0	38.9	127.0	29.4	35.0	20.7	51.0	165.0	1.05	4100	25500 / 15300	15300	PBS 35	72 PBS / RAE 35 NPPB
40	55.0	53.5	23.0	4.0	106.0	13.5	8.0	43.7	136.5	32.7	40.0	25.0	58.0	180.0	1.33	4500	32500 / 19800	19800	PBS 40	80 PBS / RAE 40 NPPB

* Mesuré sur la bague intérieure.
En principe, nous ne livrons que des paliers complets.