


Taper Bore Sprockets for 1" Pitch British Standard Chains Type 16B

Conforming to ISO Std 606

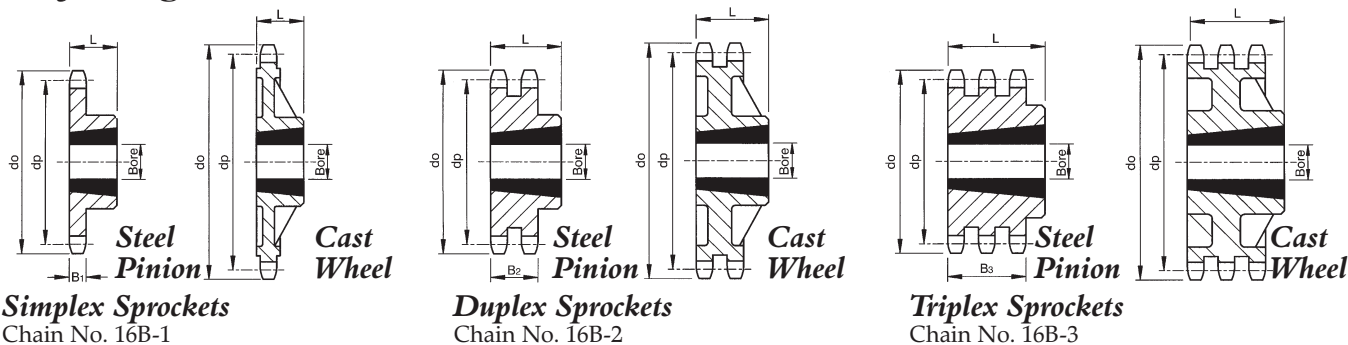

Cat. No.	No. Teeth	Pitch Circle Ø dp	Outside Ø do	Taper Bore Bush			Length L	Approx. Weight kg
				Bush No.	Min. Bore	Max. Bore		

Simplex Chain No. 16B-1 - Tooth Width B₁ - 16.2mm

TB16B1-13	13	106.12	117.0	1615	14	42	38	0.8
TB16B1-14	14	114.15	125.0	1615	14	42	38	1.0
TB16B1-15	15	122.17	133.0	1615	14	42	38	1.3
TB16B1-16	16	130.20	141.0	2012	14	50	32	1.7
TB16B1-17	17	138.22	149.0	2012	14	50	32	1.8
TB16B1-18	18	146.28	157.0	2517	19	65	45	2.3
TB16B1-19	19	154.33	165.2	2517	19	65	45	2.5
TB16B1-20	20	162.38	173.2	2517	19	65	45	2.7
TB16B1-21	21	170.43	181.2	2517	19	65	45	3.0
TB16B1-22	22	178.48	189.3	2517	19	65	45	3.2
TB16B1-23	23	186.53	197.5	2517	19	65	45	3.4
TB16B1-24	24	194.59	205.5	2517	19	65	45	3.8
TB16B1-25	25	202.66	213.5	2517	19	65	45	4.1
TB16B1-26	26	210.72	221.6	2517	19	65	45	4.5
TB16B1-27	27	218.79	229.6	2517	19	65	45	4.8
TB16B1-28	28	226.85	237.7	2517	19	65	45	5.4
TB16B1-30	30	243.00	254.0	3020	25	75	51	7.9
TB16B1-38	38	307.59	320.7	3020	25	75	51	8.5
TB16B1-45	45	364.13	377.0	3020	25	75	51	10.7
Cast Iron Wheels								
TB16B1-57	57	461.08	474.0	3020	25	75	51	12.0
TB16B1-76	76	614.65	627.0	3020	25	75	51	18.0
TB16B1-95	95	768.22	781.0	3020	25	75	51	28.0
TB16B1-114	114	921.81	933.0	3030	25	75	76	40.0

Duplex Chain No. 16B-2 - Tooth With B₂ - 47.7mm

TB16B2-15	15	122.17	133.0	2012	14	50	48	2.1
TB16B2-16	16	130.20	141.0	2517	19	65	48	2.1
TB16B2-17	17	138.22	149.0	2517	19	65	48	2.5
TB16B2-18	18	146.28	157.0	2517	19	65	48	3.1
TB16B2-19	19	154.33	165.2	2517	19	65	48	3.8
TB16B2-20	20	162.38	173.2	2517	19	65	48	4.5
TB16B2-21	21	170.43	181.2	3020	25	75	51	4.2
TB16B2-22	22	178.48	189.3	3020	25	75	51	5.0
TB16B2-23	23	186.53	197.5	3020	25	75	51	5.8
TB16B2-24	24	194.59	205.5	3020	25	75	51	6.7
TB16B2-25	25	202.66	213.5	3020	25	75	51	7.6
TB16B2-26	26	210.72	221.6	3020	25	75	51	8.3
TB16B2-27	27	218.79	229.6	3020	25	75	51	9.0
TB16B2-28	28	226.85	237.7	3020	25	75	51	10.0
TB16B2-30	30	243.00	254.0	3030	25	75	76	10.8
TB16B2-38	38	307.59	320.7	3030	25	75	76	13.0
Cast Iron Wheels								
TB16B2-45	45	364.13	377.0	3020	25	75	51	15.0
TB16B2-57	57	461.08	474.0	3525	32	90	65	26.2
TB16B2-76	76	614.65	627.0	3525	32	90	65	40.5
TB16B2-95	95	768.22	781.0	3525	32	90	65	55.0
TB16B2-114	114	921.81	933.0	4040	40	100	102	65.0

Triplex Chain No. 16B-3 - Tooth With B₃ - 79.6mm

TB16B3-17	17	138.22	149.0	2517	19	65	80	4.2
TB16B3-19	19	154.33	165.2	3030	25	75	80	3.8
TB16B3-21	21	170.43	181.2	3030	25	75	80	6.6
TB16B3-23	23	186.53	197.5	3535	32	90	89	7.3
TB16B3-25	25	202.66	213.5	3535	32	90	89	10.3
TB16B3-27	27	218.79	229.6	3535	32	90	89	13.2
TB16B3-30	30	243.00	254.0	3535	32	90	89	19.0
TB16B3-38	38	307.59	320.7	3535	32	90	89	24.0
Cast Iron Wheels								
TB16B3-45	45	364.13	377.0	4030	40	100	76	32.0
TB16B3-57	57	461.08	474.0	4030	40	100	76	40.0
TB16B3-76	76	614.65	627.0	4030	40	100	76	58.0
TB16B3-95	95	768.22	781.0	4030	40	100	76	85.0
TB16B3-114	114	921.81	933.0	4545	55	110	114	90.0

All dimensions in mm. Details Taper Bore Bushes refer pp 34/35.

Tel +44 121 360 0155

Fax +44 121 325 1079

Email sales@crossmorse.com