


Conforme aux normes de sécurité ANSI/ASME
Soulèvement vertical et rotation des objets sans heurt

PRISE VERTICALE

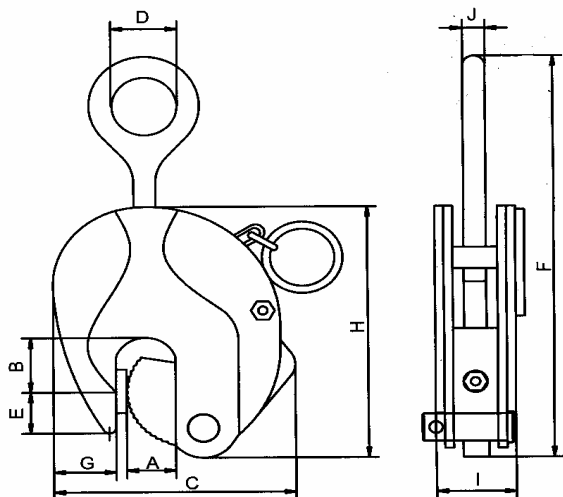

HPL10

Modèle		HPL10	HPL20	HPL30	HPL50
Capacité	Kg	1000	2000	3000	5000
Ouverture	mm	0-22	0-30	0-35	5-45
Poids	Kg	3,6	6	9,2	17
Dimensions mm	A	24	35	40	50
	B	36	45	50	58
	C	155	155	175	218
	D	50	60	60	65
	E	24	30	35	42
	F	220-260	250-295	296-360	350-420
	G	30	38	40	60
	H	156	190	226	270
	I	52	60	68	76
	J	14	18	20	22

