





PINCES A TÔLE

PLB

Conforme aux normes de sécurité ANSI/ASME
Soulèvement vertical et rotation des objets sans heurt

PRISE HORIZONTALE

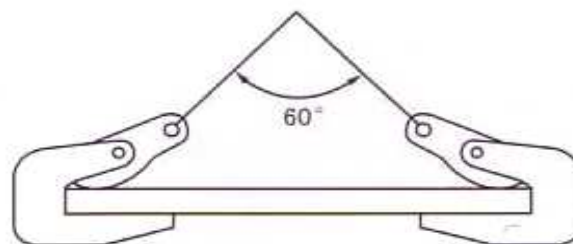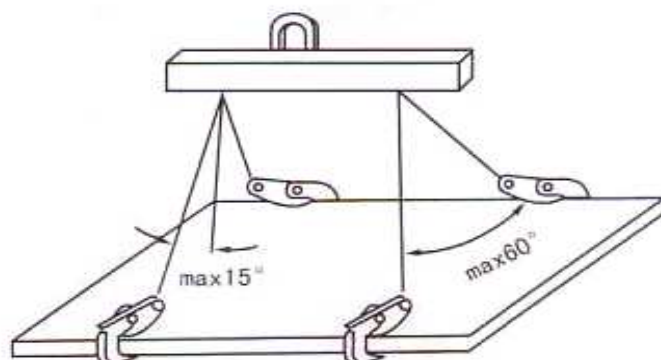

Modèle	Capacité à la paire (T)	Ouverture(mm)	Poids(Kg)
PLB0,8	0,8	0-25	2,5
PLB1	1	0-30	3,5
PLB1,6	1,6	0-30	4
PLB2	2	0-40	5
PLB3,2	3,2	0-45	6
PLB4	4	0-50	6,5
PLB5	5	0-55	7,5
PLB6	6	0-65	10,5
PLB6(B)	6	0-130	22
PLB8	8	0-100	/
PLB10	10	0-125	/

