


Doivent être placées à l'avant de la charge
Prévoir un rayon de giration de 3 mètres



Modèle	A	B	C	Ø D	E	F	G	I	Poids
TR10	220	74	41	128	11	8	88	5	4,5
TR20	220	86	41	128	11	8	88	5	4,5
TR30	250	95	46	150	11	8	105	5	6,7
TR40	275	114	64	190		3	165	11	13,7
TR50	360	128	64	220		3	235	11	18,9

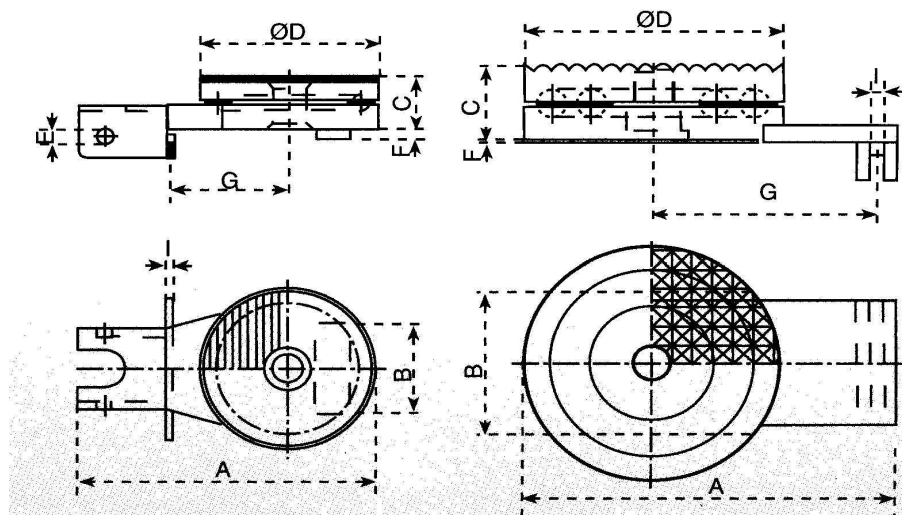