
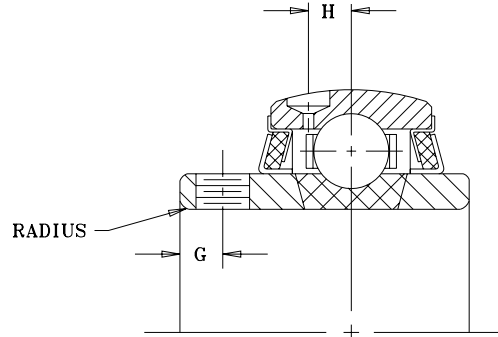


SEALMASTER® MOUNTED BALL BEARINGS

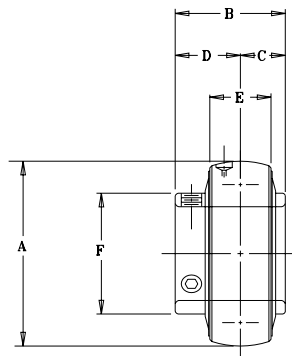

Standard Duty Bearing Inserts...Setscrew Locking – Single Lock

SHAFT DIAM.	BRG. NO.	Dimensions in Inches									SET SCREW TAP	UNIT WT.
		A	B	C	D	E	F	G	H	RADIUS		
1/2 9/16 5/8 11/16 3/4 20	2-08 2-09 2-010 2-011 2-012 5204	47MM 1.8504	1 7/32	1/2	23/32	5/8	1 3/16	3/16	9/64	.040	1/4-28	.5
13/16 7/8 15/16 1 25	2-013 2-014 2-015 2-1 5205	52MM 2.0472	1 3/8	9/16	13/16	11/16	1 3/8	7/32	11/64	.040	1/4-28	.6
1 1/16 1 1/8 1 3/16 1 1/4 30	2-11 2-12 2-13 1-14 5206	62MM 2.4409	1 1/2	5/8	7/8	7/8	1 19/32	7/32	7/32	.040	1/4-28	1.0
1 1/4 1 5/16 1 3/8 1 7/16 35	2-14 2-15 2-16 2-17 5207	72MM 2.8346	1 11/16	11/16	1	15/16	1 55/64	1/4	1/4	.040	5/16-24	1.5
1 1/2 1 9/16 40	2-18 2-19 5208	80MM 3.1496	1 15/16	3/4	1 3/16	1 3/32	2 1/16	5/16	19/64	.062	5/16-24	1.9
1 5/8 1 11/16 1 3/4 45	2-110 2-111 2-112 5209	85MM 3.3465	1 15/16	3/4	1 3/16	1 3/32	2 19/64	5/16	19/64	.062	5/16-24	2.2
1 13/16 1 7/8 1 15/16 2 50	2-113 2-114 2-115 1-2 5210	90MM 3.5433	2 1/32	3/4	1 9/32	1 1/8	2 15/32	3/8	17/64	.062	3/8-24	2.4
2 2 1/8 2 3/16 55	2-2 2-22 2-23 5211	100MM 3.9370	2 3/16	7/8	1 5/16	1 3/16	2 23/32	3/8	19/64	.080	3/8-24	2.8
2 1/4 2 3/8 2 7/16 60	2-24 2-26 2-27 5212	110MM 4.3307	2 9/16	1	1 9/16	1 1/4	2 63/64	7/16	21/64	.080	3/8-24	3.7
2 11/16 70	2-211 5214	125MM 4.9213	2 3/4	1 1/16	1 11/16	1 3/8	3 7/16	7/16	3/8	.080	7/16-20	5.8
2 7/8 2 15/16 75	2-214 2-215 5215	130MM 5.1181	3 1/16	1 5/16	1 3/4	1 1/2	3 41/64	7/16	3/8	.080	7/16-20	6.8
3 3/16 80	2-23 5216	140MM 5.5118	3 1/4	1 5/16	1 15/16	1 11/16	3 59/64	17/32	13/32	.120	7/16-20	7.2
3 1/4 3 3/8 3 7/16	2-34 2-36 2-37	150MM 5.9055	3 3/8	1 11/32	2 1/32	1 15/16	4 5/32	15/32	17/32	.120	7/16-20	9.3
3 1/2 90	2-38 5218	160MM 6.2992	3 25/32	1 9/16	2 7/32	2	4 25/64	5/8	15/32	.120	1/2-20	11.7

Felt seal standard. For contact seal add suffix "C" (2-1C).
For Load Ratings, see page 45.