



réf.
2952

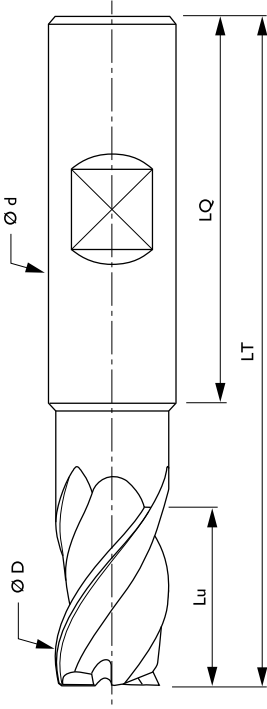


Fraise Carbone Monobloc

toutes opérations

Ø D	LT	Lu	Ø d x LQ	Z	Code Article
3	57	7	6 x 36	3	D2952D0300
4	57	8	6 x 36	3	D2952D0400
5	57	10	6 x 36	3	D2952D0500
6	57	10	6 x 36	3	D2952D0600
8	63	10	8 x 36	3	D2952D0800
10	72	19	10 x 40	3	D2952D1000
12	83	22	12 x 45	3	D2952D1200
14	83	22	14 x 45	3	D2952D1400
16	92	26	16 x 48	3	D2952D1600
18	92	26	18 x 48	3	D2952D1800
20	104	32	20 x 50	3	D2952D2000

Attachement	Caractéristiques	Utilisation	Normes	Passé Maxi	Tolérances
 Cylindrique  Plat sur demande à partir du Ø 12 DIN 6535HB	Coupe à droite Hélice à droite : 40° Nombre de dents : 3 Goujures : N Dépouille : Curviligne 10° Coupe : 8°	USINAGE VITESSE CONVENTION- NELLE	DIN 6527L		Ø D ► h10 Ø d ► h6 LT ► +2 / 0 Lu ► +1.5 / 0
Nature Outil	Carbure MK 15	Lubrification	Origines		
		Avec ou Sans	Made in France		



ISO 9001



VITESSES DE COUPE & AVANCE > PAGES 92 à 95

